

## INSTALLATION NOTES

1. Before opening cartons please carefully check the marks on the package, ensure to use the product of the specification and color code. Please check the quality of the product and immediately contact local distributors or our company if there is any objection or enquiry to the quality.
2. Make a trial pavement before mass pavement, use up one color and size before using the other. Divide various tiles by color and size, and mark on the bottoms of the tiles, if there are patterns of directional designs on the tiles, please follow the ways shown in the guide signs to get an optimum decoration.
3. Put the (Glazed tiles) into the water to make 100% dip in 2 hours and take it out unless the tiles are no bubble. Lay the tiles in dry place and move the water.
4. Clean the place and spray some water for easier operation: to mix the cement ( $\leq 325\#$ ) and sand at the rate of 1:2 (the cement plaster should not be over 200# otherwise, high grade of cement plaster will result in the defective decorating affection, even quality accidents), to smooth the cement plaster with a 1 meter long rule and then put the there as yard stick, Finally, Spray again with the cement powder to improve the stickness.
5. 2-5mm of mortar-slit is needed to avoid the separating of tiles for the expansion coefficient of the tiles and lining cement is different (but 2mm is better for the general effect). 3mm of mortar-slit is confirmed needed between floor and wall. The cement which more than 325# is not suggested, in case of the glazed surface crack, please use the cement which is improved by scoria, pozzolana, coal powder.
6. Pavement should be done after the consolidation of based layer. Which operating, put the tile slightly and make it parallel to the space, to let the pores out, knock the tiles with the handle of the hammer, to soak the bottom of the tiles entirely with the cement plaster to avoid the hollows, and knock the surface of the tiles again until it is in the flat situation, meanwhile test them with a horizontal ruler to ensure a horizontal surface.
7. About 1 hour after placement (up to the weather and setting of cement). Wipe the cement on the surface of tiles with spongy. It will be difficult to clean if the dirt keeps on the surface of the tiles too long.
8. Knock the surface of tiles with a wooden hammer after 12 hours to confirm if there is hollows exist. If a sound is heard while knocking, it means that the hollow exists and a repavement is needed, it should not be stepped within 24 hours.
9. Avoiding the scratch of hard materials in the operation so as to keep the luster of the tiles. Keep the surface clean and resist of the colored liquid, if the surface is polluted by colored liquid, clean the tile at once.

## PACKING AND WEIGHT

Size (mm)	Pcs/Box	Kgs/Box	M <sup>2</sup> /Box	Boxes/Pallet	M <sup>2</sup> /Pallet	Boxes/20'Fcl	Kgs/20'Fcl	M <sup>2</sup> /20'Fcl
600X600	4	31.5	1.44	36	51.84	850	26775	1224

## GUANGDONG JINBALI CERAMICS CO.,LTD.

Add : Chongnan Industrial park, xiqiao, Nanhai District, foshan

Tel : 0757-86837950 Fax : 0757-86837952

Http : //www.jinbali.cn E-mail : info@jinbali.cn

Asin printing. The colors products may differ slightly with the real ones. So the true product colors shall be followed in application.

TIANCHENG DESIGN

Black Cherry  
Marble



## JINBALI CERAMICS

# ABOUT US

Guangdong Jinbali Ceramics Co. Ltd is a well established ceramic producing company founded in 1998. Since the foundation, Guangdong Jinbali has maintained an excellent market reputation for large-scale ceramic production.

The company is located in Guangdong Province' s "Southland pottery - Foshan city ", which holds the country' s largest building ceramic production industry.

With the help of advanced machinery, as well as a modern laboratory committed to the research and development of new technological solutions, Guangdong Jinbali aims at producing excellent quality ceramic tiles for its customers.

Innovation has become the drive behind our new producing strategy, a principle that has given us the competence to cater for different lifestyles all around the world. What makes our company more formidable is the ability to satisfy the consumers' ever-changing and unique taste.

Moreover, in the bid to achieve our goals without putting the environment at risk we have adopted the new environmental protection, production of ceramics.

Black Cherry Marble is a kind of black marble quarried in Turkey. This stone is especially good for Exterior - Interior wall and floor applications, countertops, mosaic, fountains, pool and wall capping, stairs, window sills, etc and other design projects. Black Cherry Marble can be processed into Polished, Sawn Cut, Sanded, Rockfaced, Sandblasted, Tumbled and so on.

# BAVARIA

Used for inner or outer decoration of home, bar or store


Fitment Project

 For Kitchen
  Washroom
  Living Room
  Office Building
  Market
  Cafes
  Bar
  West Restaurant
  Hotel
  Metro

 Floor Tiles
  Wall Tiles

Size(mm)	Pcs / Box	Kgs / Box	M <sup>2</sup> / Box
600*600	4	31.5	1.44

Machinable Specifications:

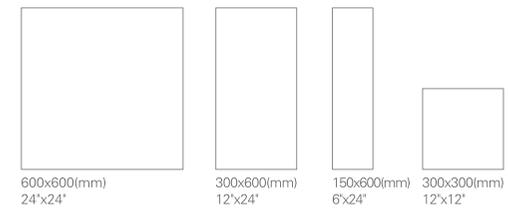

Modle: J6003BY

600x600mm

# ISAR

Used for inner or outer decoration of home, bar or store



Filment Project

 For Kitchen
  Washroom
  Living Room
  Office Building
  Market
  Cafes
  Bar
  West Restaurant
  Hotel
  Metro

 Floor Tiles
  Wall Tiles


Size(mm)	Pcs / Box	Kgs / Box	M <sup>2</sup> / Box
600*600	4	31.5	1.44

Machinable Specifications:

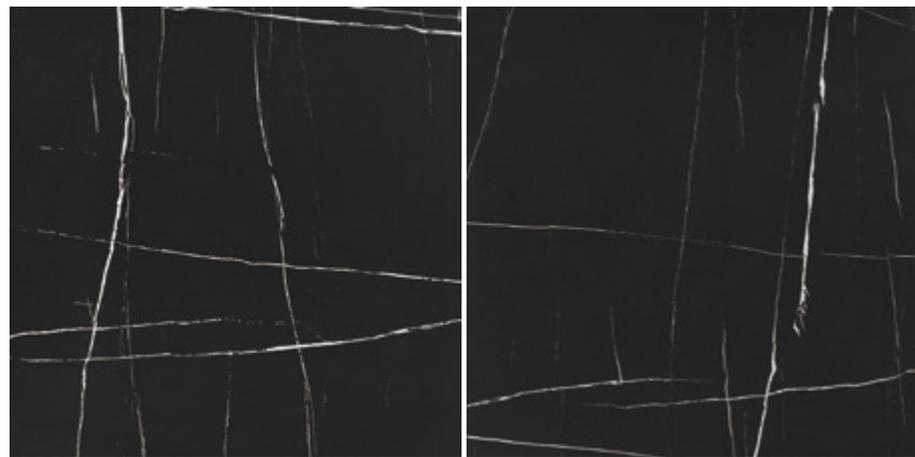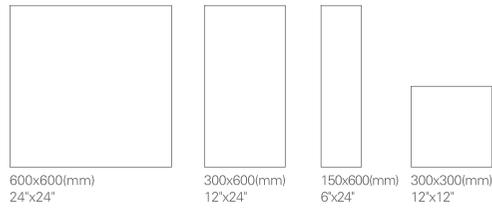

Modle: J6003IS

600x600mm

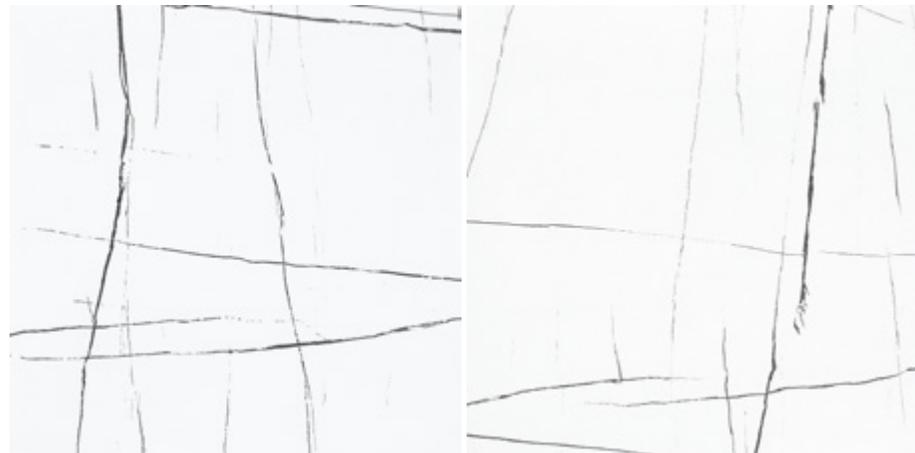

Modle: J6005IS

600x600mm

# DANUBE

Used for inner or outer decoration of home, bar or store



Filment Project

 For Kitchen
  Washroom
  Living Room
  Office Building
  Market
  Cafes
  Bar
  West Restaurant
  Hotel
  Metro

 Floor Tiles
  Wall Tiles

Size(mm)	Pcs / Box	Kgs / Box	M <sup>2</sup> / Box
600*600	4	31.5	1.44

Machinable Specifications:

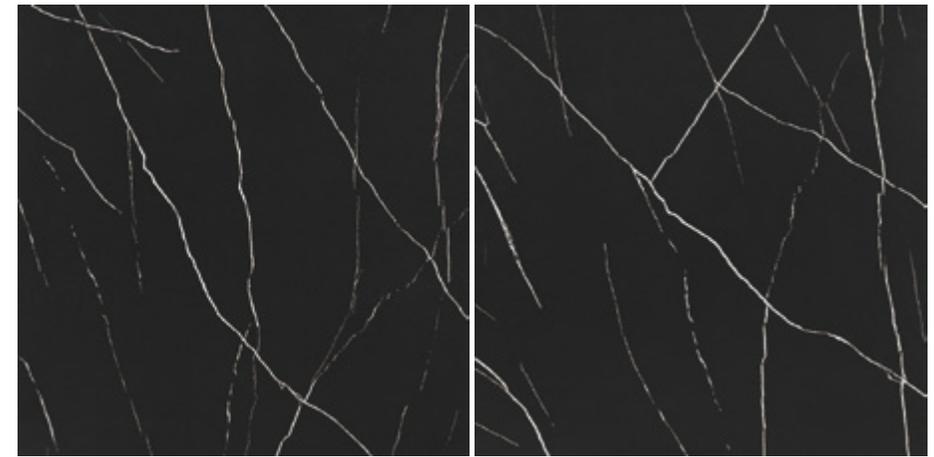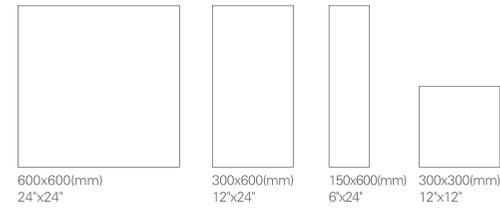

Modle: J6003DA

600x600mm



Modle: J6005DA

600x600mm